


WPKHXX OPTIONAL

WPKXX

CMP RATED CABLE FOR PLENUM APPLICATIONS

**ACTUATOR OUTPUT TORQUE - 90 in/ lbs.
MAX WORKING PRESSURE - 125 PSI**

ALL VALVES ARE CERTIFIED TO NSF/ANSI 372 FOR USE WITH POTABLE WATER

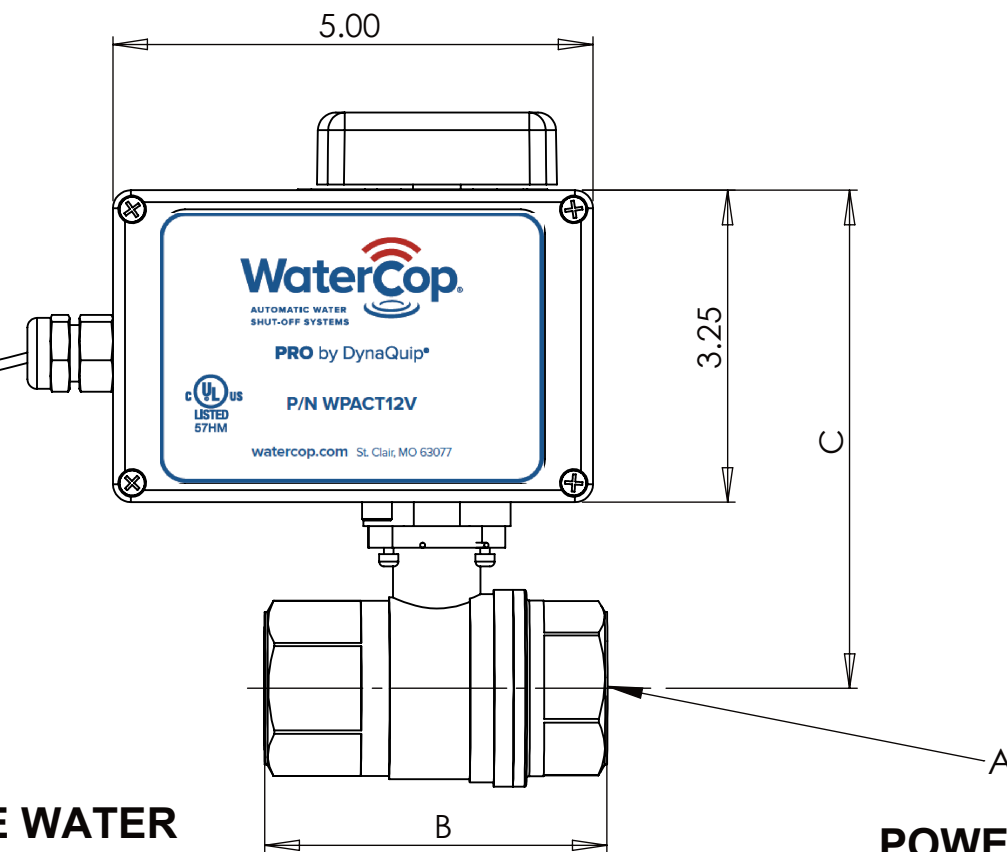

POWER SUPPLY INCLUDED

Model	Cable Length	Hardwired Sensors
WPK25	25'	No
WPKH25	25'	Yes
WPK50	50'	No
WPKH50	50'	Yes
WPK75	75'	No
WPKH75	75'	Yes

Valve Size	A	B	C	Flow GPM
1/2	1/2 - 14 NPT	2.60	4.78	19
3/4	3/4-14 NPT	2.90	5.02	34
1	1 - 11-1/2 NPT	3.56	5.19	52
1 1/4	1-1/4 - 11-1/2 NPT	3.66	5.18	77

UNCONTROLLED DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. WaterCop Pro **FILE NO.** SUB. 281

TITLE WaterCop Pro Integrated Indoor

DR	DATE	CHKD	DATE	ENGR	DATE
MDC	11-22-22	MWS	06-23-15	MWS	06-23-15

