

Leak Detection & Automatic Water Shut-Off

for Outdoor Shut-Off Locations

Introducing the next generation of outdoor WaterCop® Flood Prevention Systems.

The WaterCop® Pro Outdoor System adds valuable features like an improved user interface and flexible installation options. WaterCop® Pro Outdoor Systems are preferred for custom-built or expensive homes, multi-family, condominium or commercial use where combinations of hardwired and wireless sensors communicate with an indoor Water Control Panel and hardwired actuator.

WaterCop® Pro provides the most complete plumbing leak protection while offering the most flexible installation options and third party monitoring/security integration.



Outdoor Shut-Off Valve hardwired to indoor Water Control Panel

Indoor Water Control Panel with visual system status, simple user controls, standard security and home automation systems integration and on-board relays


- Flexible wiring, mounting and installation options
- External manual override
- Audible alarm



Indoor Water Control Panel



Low Profile Wireless Flood Sensors fully supervised and addressable

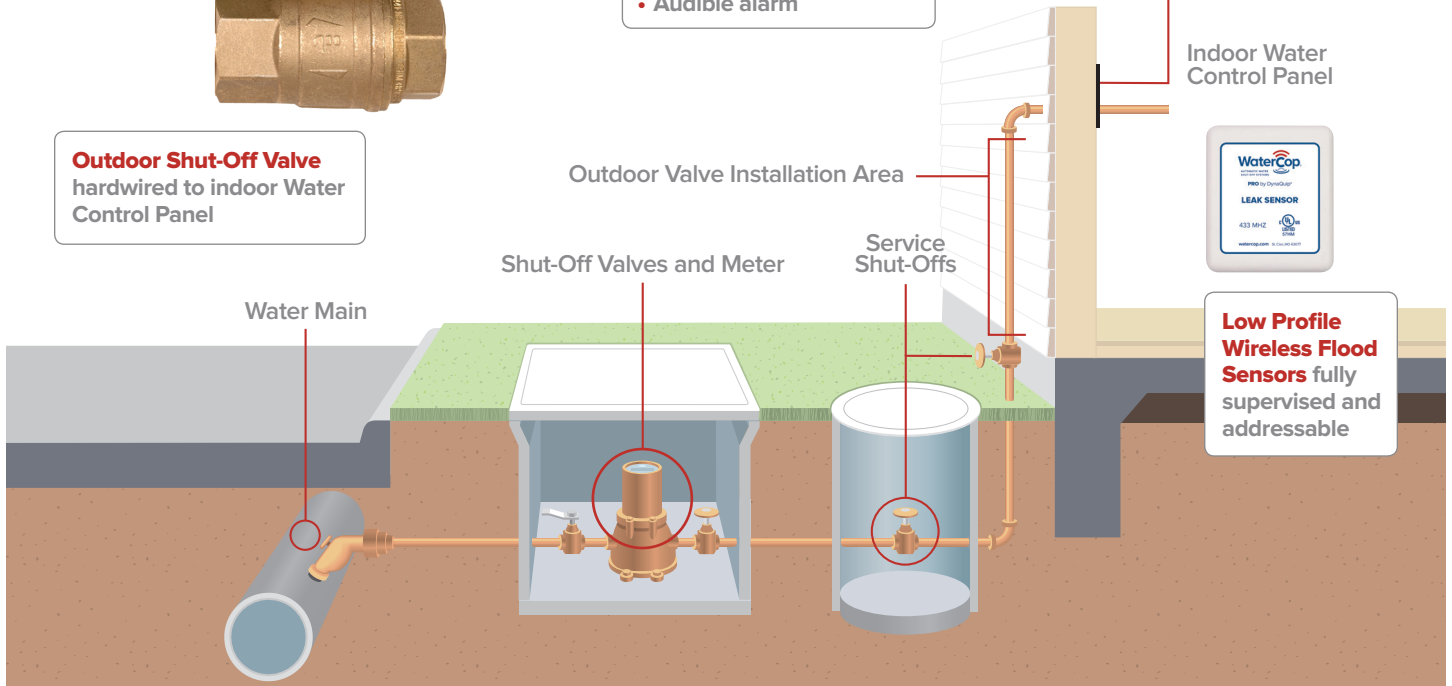

The proven leader in household leak protection: **WaterCop®** is there when you're not.

WaterCop® Pro quickly detects and automatically stops common plumbing floods.

WaterCop® Pro Outdoor Systems

Automated leak protection



Features

- NSF/ANSI 372* approved lead-free brass, full flow, 600 psi rated industrial valve
- Sizes ½" – 1¼" standard (1½" to 4" large valve integration available)
- External manual override handle
- Internal antenna on actuator and wireless sensors
- Single or dual wireless sensors available
- Fully supervised and addressable sensors alert upon water detection, power lost, low battery, and sensor short/open
- 10' white sensor cord with corrosion-resistant gold-plated prongs
- Supports up to 45 wireless dual sensors (90 point detection)
- Wireless sensor signal can be enhanced for longer distances (Part No. WPR)
- Local open/close water control
- Can be used for above grade or below grade
- Connection cable is not direct burial rated

* Lead Free NSF/ANSI 372 refers to the wetted surface of pipe, fitting and fixtures in potable water systems that have a weighted average lead content ≤ 0.25%. Source: California Health & Safety Code (116875); Vermont Act 193.

Ordering Information

Step One: Select appropriate shut-off valve by size

SIZE (FNPT)	PART NO. (LEAD FREE NSF/ANSI 372)
½"	WCVLF ½
¾"	WCVLF ¾
1"	WCVLF 1
1¼"	WCVLF 1¼

Step Two: Select your system

WaterCop® Pro Outdoor System

PART NO.	DESCRIPTION
WPK25W	CONTROL PANEL WITH 25' CABLE & PRO ACTUATOR
WPK50W	CONTROL PANEL WITH 50' CABLE & PRO ACTUATOR
WPK75W	CONTROL PANEL WITH 75' CABLE & PRO ACTUATOR
WPKH25W	CONTROL PANEL (+HW INPUTS) 25' CABLE & PRO ACTUATOR
WPKH50W	CONTROL PANEL (+HW INPUTS) 50' CABLE & PRO ACTUATOR
WPKH75W	CONTROL PANEL (+HW INPUTS) 75' CABLE & PRO ACTUATOR

Step Three: Select accessories

PART NO.	DESCRIPTION
WPFS1	WATERCOP PRO FLOOD SENSOR (SINGLE)
WPFS2	WATERCOP PRO FLOOD SENSOR (DUAL)
WPR	WATERCOP PRO RANGE ENHANCING SENSOR REPEATOR
WPSC	WATERCOP PRO FLOOD SENSOR CABLE & PROBE (10')
WPA	WATERCOP PRO FLOOD SENSOR POWER ADAPTER
WPFST	LOW TEMPERATURE SENSOR CLIP & SINGLE FLOOD SENSOR
WPFSDT	HI/LOW TEMPERATURE (AMBIENT AIR) & FLOOD SENSORS
RS100	WIRED WATER CONTROL WALL SWITCH



To order or for additional information, visit watercop.com or call 800-545-3636.