

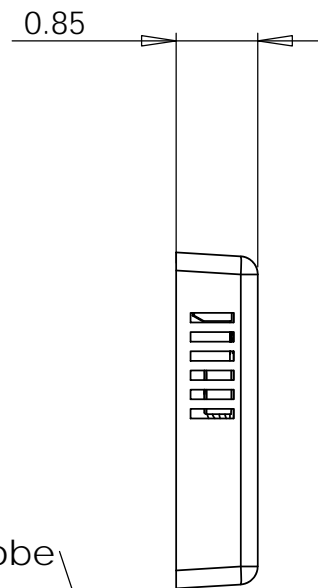



Wiring

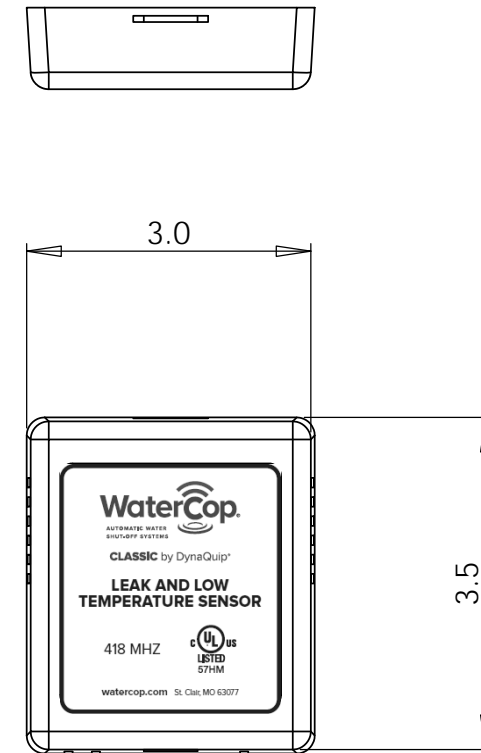

Temperature Probe

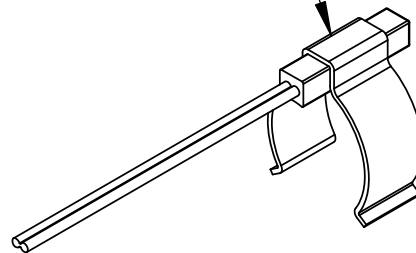

Water Probe

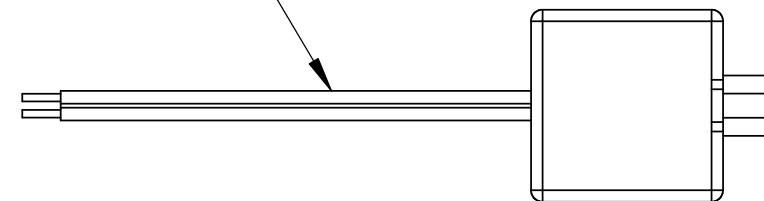

Enclosure: ABS
 Power Requirements: 2 AA Alkaline Batteries
 (Optional Power Converter)
 Sensor Probe: 10' Cord
 Mounting: Screws and Anchors Provided
 Frequency: 418 MHz
 TEMPERATURE TRIP POINT APPROX 34°F

UNCONTROLLED
DRAWING

THIS PRINT IS THE PROPERTY
 OF DYNAQUIP CONTROLS AND
 SHALL NOT BE COPIED,
 REPRODUCED, LOANED,
 OR DISPOSED OF DIRECTLY
 OR INDIRECTLY, NOR USED
 FOR ANY PURPOSE OTHER THAN
 THAT FOR WHICH IT IS
 SPECIFICALLY FURNISHED
 EXCEPT BY WRITTEN
 PERMISSION OF
 DYNAQUIP CONTROLS.

NO. **WCDFST** FILE NO. **SUB354**

TITLE **Combo Sensor
Temp & LEAK
WaterCop Classic**

DR	DATE	CHKD	DATE	ENGR	DATE
CMM	04-10-18	MWS	08-20-15	MWS	08-20-15

