

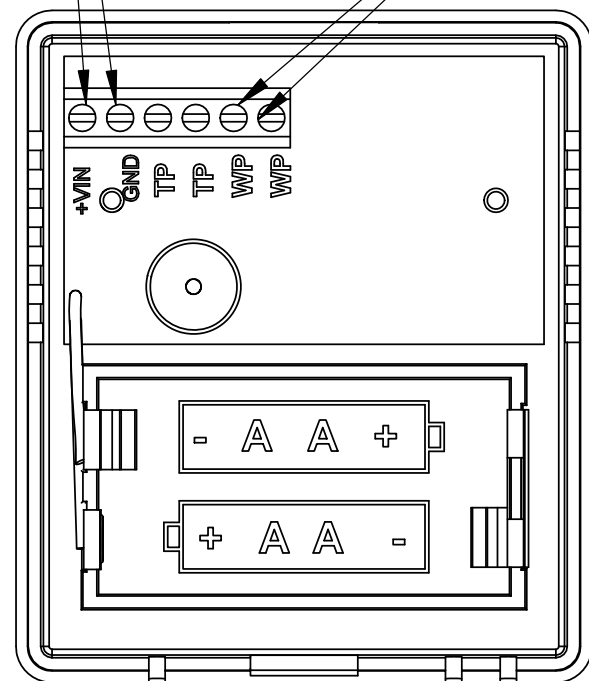
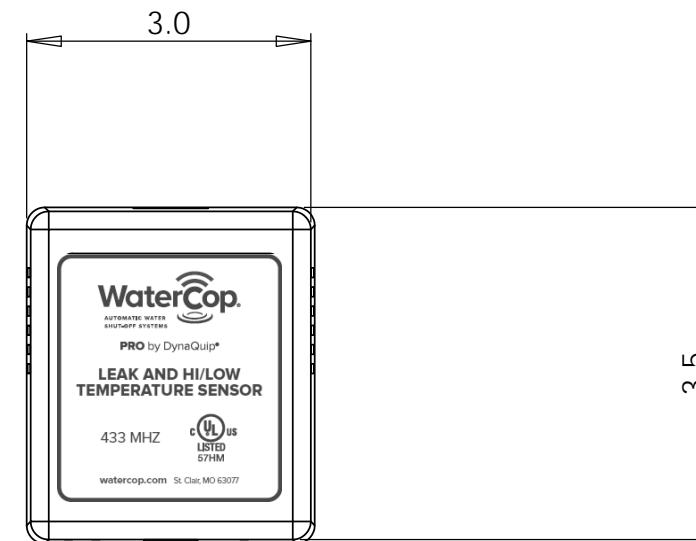


POWER SUPPLY CONNECTION


WATER PROBE CONNECTION



WIRING

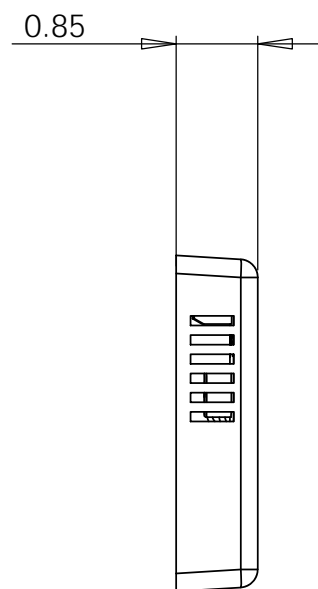

WATER PROBE



ENCLOSURE: ABS
 POWER REQUIREMENTS: 2 AA ALKALINE BATTERIES
 (OPTIONAL POWER CONVERTOR)
 SENSOR PROBE: 10' CORD
 MOUNTING: SCREWS AND ANCHORS PROVIDED
 AMBIENT TEMPERATURE TRIP POINTS: 34°F & 84°F

**UNCONTROLLED
 DRAWING**

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. **WPFSDT** FILE NO. **SUB287**

TITLE **COMBO SENSOR
 TEMP & LEAK**

DR	DATE	CH'KD	DATE	ENGR	DATE
CMM	04-30-18	MWS	11-19-14	MWS	11-19-14

