




POWER SUPPLY CONNECTION  
 TEMPERATURE PROBE CONNECTION  
 WATER PROBE CONNECTION

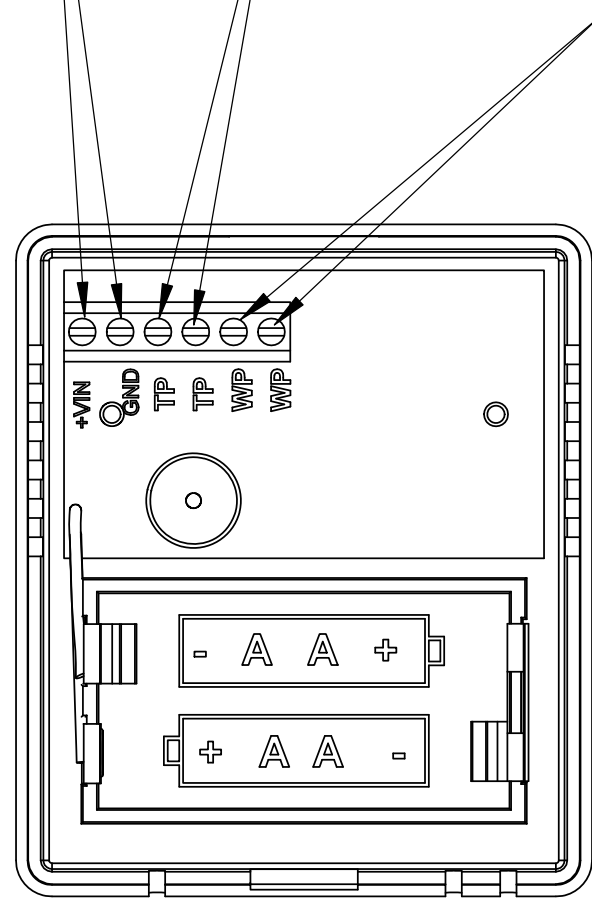



**WIRING**

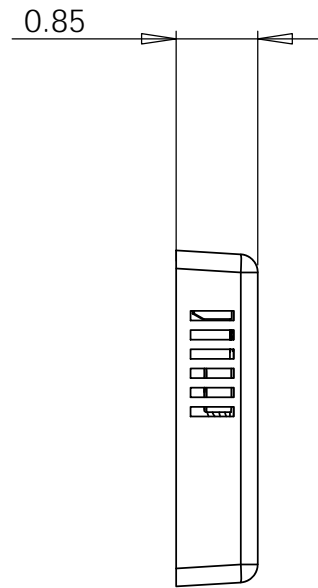

TEMPERATURE PROBE

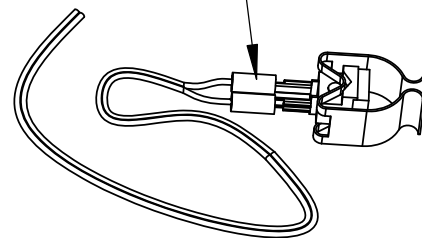

WATER PROBE

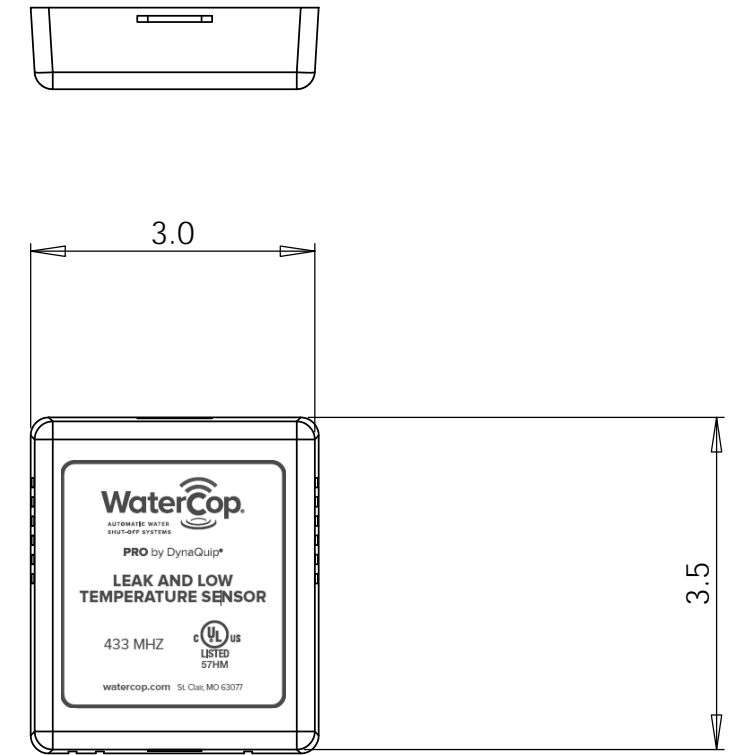

ENCLOSURE: ABS  
 POWER REQUIREMENTS: 2 AA ALKALINE BATTERIES  
 (OPTIONAL POWER CONVERTOR)  
 SENSOR PROBE: 10' CORD  
 MOUNTING: SCREWS AND ANCHORS PROVIDED  
 TEMPERATURE TRIP POINT APPROX 34°F

UNCONTROLLED  
 DRAWING

THIS PRINT IS THE PROPERTY OF DYNAQUIP CONTROLS AND SHALL NOT BE COPIED, REPRODUCED, LOANED, OR DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED EXCEPT BY WRITTEN PERMISSION OF DYNAQUIP CONTROLS.

NO. **WPFST** FILE NO. **SUB228**

TITLE **COMBO SENSOR TEMP & LEAK**

DR	DATE	CH'KD	DATE	ENGR	DATE
CMM	04-30-18	MJP	02-01-12	MJP	02-01-12

