










WaterCop Pro Outdoor

Leak detection and automatic shut-off for outdoor shut-off locations.

The WaterCop® Pro Outdoor System features addressable sensors, a user interface with an LED screen, and flexible installation options. WaterCop® Pro Outdoor Systems are preferred for custom-built or expansive homes, multi-family, condominium or commercial use where combinations of hardwired, wireless, rope and pressure sensors communicate with an indoor Water Control Panel and hardwired actuator. WaterCop® Pro provides the most complete plumbing leak protection while offering the most flexible installation options and third party monitoring/security integration or an optional SmartConnect WiFi device with free WaterCop mobile app.

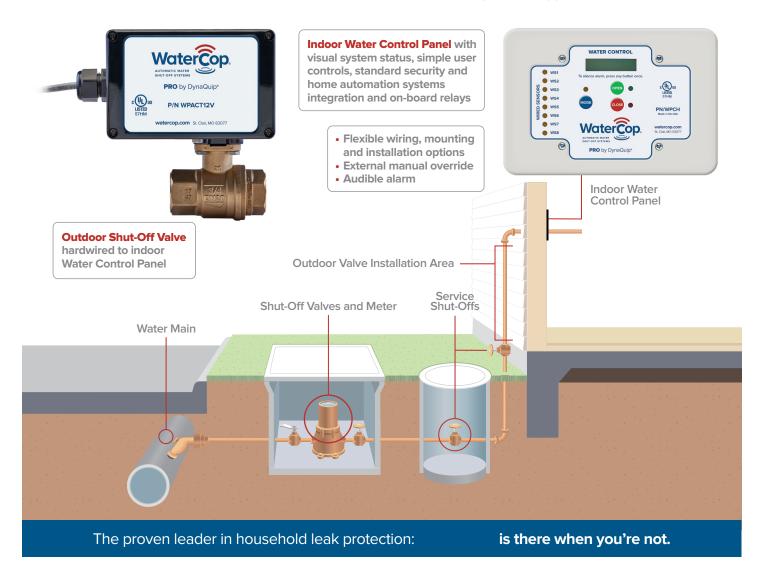

WaterCop® Pro quickly detects and automatically stops common plumbing floods.

WaterCop® Pro Outdoor System



Ordering Information

Step One: Select appropriate shut-off valve by size

SIZE (FNPT)	PART NO. (LEAD FREE NSF/ANSI 372)
1/2"	WCVLF 1/2
3/4"	WCVLF ¾
1"	WCVLF 1
11⁄4"	WCVLF 11/4

Step Two: Select your system

WaterCop® Pro Outdoor System

PART NO.	DESCRIPTION
WPK25W	CONTROL PANEL WITH 25' CABLE & PRO ACTUATOR
WPK50W	CONTROL PANEL WITH 50' CABLE & PRO ACTUATOR
WPK75W	CONTROL PANEL WITH 75' CABLE & PRO ACTUATOR
WPKH25W	CONTROL PANEL (+HW INPUTS) 25' CABLE & PRO ACTUATOR
WPKH50W	CONTROL PANEL (+HW INPUTS) 50' CABLE & PRO ACTUATOR
WPKH75W	CONTROL PANEL (+HW INPUTS) 75' CABLE & PRO ACTUATOR

- NSF/ANSI 372* approved lead-free brass, full flow, 600 psi rated industrial valve
- Sizes $\frac{1}{2}$ " $\frac{11}{4}$ " standard ($\frac{11}{2}$ " to 4" large valve integration available)
- Wireless sensors

Features

- · Wireless, rope and pressure sensors available
- Fully supervised and addressable sensors alert upon water detection, power lost, low battery, and sensor short/open
- 10' white sensor cord with corrosion-resistant gold-plated prongs
- Supports up to 45 wireless dual sensors (90 point detection) or 8 hardwired sensors per control panel
- Wireless sensor signal can be enhanced for longer distances (Part No. WPR)
- Local open/close water control
- · Can be used for above grade or below grade
- · Connection cable is not direct burial rated
- * Lead Free NSF/ANSI 372 refers to the wetted surface of pipe, fitting and fixtures in potable water systems that have a weighted average lead content ≤ 0.25%. Source: California Health & Safety Code (116875); Vermont Act 193.

Step Three: Select accessories

PART NO.	DESCRIPTION
WPM	WATERCOP MULTISENSE HUB
WPSC	WATERCOP PRO LEAK SENSOR 10' CABLE AND PROBE
WPRS095	WATERCOP PRO PRESSURE SENSOR 95 PSI MAX 1/4" NPT
WROPE6	WATERCOP PRO 6' ROPE SENSOR WITH PLUG, INCLUDES 20 CLIPS
WSPLIT	WATERCOP PRO AUXILLIARY SPLITTER FOR MULTISENSE HUB
WEXT6	WATERCOP PRO AUXILLIARY 6' EXTENSION
wcsg	WATERCOP SENSOR GUARD
ACA100	WATERCOP PRO AC ADAPTER FOR LOW VOLTAGE MULTISENSE HUB
RS100	WATER CONTROL WALL SWITCH (CABLE NOT INCLUDED)
WCSCLV	WATERCOP SMART CONNECT - WIFI + MOBILE APP INTERFACE
WPR	WATERCOP PRO RANGE ENHANCING SENSOR REPEATER

SmartConnect

Receive mobile alerts and control your WaterCop system using the WaterCop app on a phone or tablet. SmartConnect is compatible with Classic, Pro and LeakStop+ systems.

- 24/7 remote mobile control and access to your WaterCop system
- · WiFi compatible
- Mobile alerts about power outages









System Requirements

- · Smart phone or tablet with:
 - Android Version 5.5 or higher or IOS
 - 10.3 or higher
 - SIM card or WiFi connectivity
- · 2.4 GHZ router with password protected WiFi
- Bluetooth 4.1 or higher
- WCAT1, WPMS, WPMSH, WCNM and WCNM2 require additional power supply. ACA sold separately.